


MAINTENANCE INSTRUCTIONS FOR MODEL 850 VALVE

1. Remove 850 valve from bag fitting. The valve can be removed by rotating the round nut counter clockwise and pulling the valve out. Be sure bag is empty.
2. Use mild dish washing detergent in warm water to wash the outside and inside surfaces of the valve. Rinse thoroughly with hot water. Allow water to flow through valve by holding inlet under water spigot and pressing the PUSH lever back. Rinse entire assembly in sanitizing solution.
3. Allow valve to air dry.
4. Should the valve require extra maintenance, the tubular seal can be removed as follows:
 - A. Grasp seal with thumb and forefinger and squeeze the opposite sides of the seal together. See view A.
 - B. Withdraw seal and wash body and seal as in step 2 above.
 - C. Replace seal by wetting in sanitizing solution and folding as described in 4A. Push seal back in valve body, taking care to push seal "EYE" over "PUSH" handle end. See view B.

EXPLODED VIEW – 850 VALVE

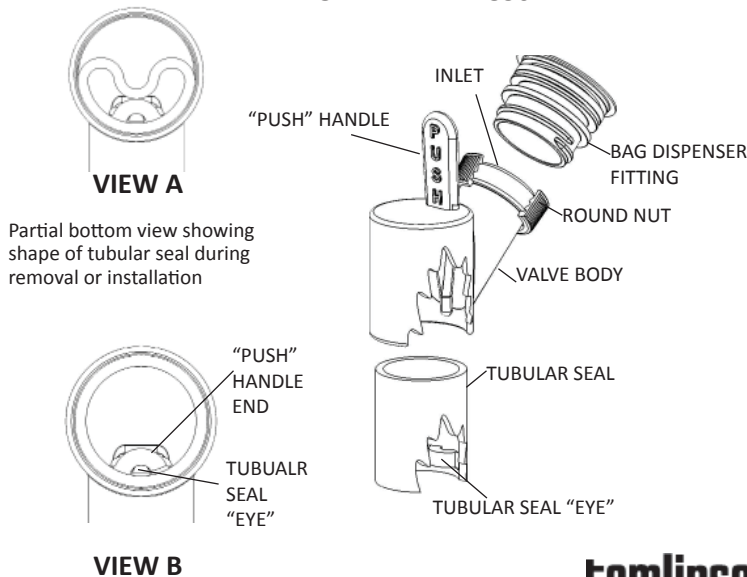

Tomlinson Industries
www.tomlinsonind.com
216-587-3400